JZ8P1520

8-BIT Microcontroller with OTP ROM

Product Specification

Version V1.1

Revision History

Version	Revision Description	Remake
V1.0	Initial version	
V1.1	Add characteristic curve	

Statement:

- This information will be updated with the improvement of the product without prior notice.

  Please consult our sales staff before using this information to ensure that the content of this information is the latest version.

- Please use this product within the limit specified in this document. We will not be responsible for any loss caused by improper use.
- Although the company has always been committed to improve the quality and reliability of products, but the semiconductor products themselves have a certain probability of failure or wrong work, in order to prevent such accidents caused by personal injury or property loss, please pay full attention to the safety design during the use.
- When exporting this product or this data overseas, it shall comply with applicable laws and regulations on import and export control.
- Without the permission of the Company, it is strictly prohibited to copy or reprint this information in part or in whole in any form.
- The test data are for reference only. The actual data are subject to the target prototype test.

CONTENT

1 General Description 6
1.1 Features 6
1.2 Pin Assignment 7
1.3 Pin Description 8
2 Memory Structure 9
2.1 Program Memory Area 9
2.2 Data Memory Area 9
2.2.1 RPAGE\IOPAGE\Bank Data Register Area 9
3 Functional Description 11
3.1 Operational Registers 11
3.1.1 RPAGE~R0(Indirect Address Register) 11
3.1.2 RPAGE~R1(TCC Time Clock/Counter) 11
3.1.3 RPAGE~R2(PC Program Counter) 11
3.1.4 RPAGE~R3(STATUS Status Register) 11
3.1.5 RPAGE~R4(FSR RAM Select Register) 12
3.1.6 RPAGE~R6(PORT6 Data Register) 12
3.1.7 RPAGE~R8(PWM Control Register) 12
3.1.8 RPAGE~R9(PWM Cycle Register) 13
3.1.9 RPAGE~RA(PWM1 Duty Register) 13
3.1.10 RPAGE~RB(PWM2 Duty Register) 13
3.1.11 RPAGE~RC(PWM3 Duty Register) 13
3.1.12 RPAGE~RD(P6 Port Interrupt Wake-up Enable Register) 13
3.1.13 RPAGE~RE(CPU Mode Controls Registers) 15
3.1.14 RPAGE~RF(Interrupt Flag Register) 15
3.2 Control Register 17
3.2.1 CONT (Control Register) 17
3.2.2 IOPAGE~IOC6(P6 Direction Control Register) 17
3.2.3 IOPAGE~IOC9(Port Pull-up Or Pull-down Control Register) 18
3.2.4 IOPAGE~IOCB(Port Pull-down Control Register) 18
3.2.5 IOPAGE~IOCD(P6 Pull-up Control Register) 18
3.2.6 IOPAGE~IOCE(WDT Enable Control Register) 18
3.2.7 IOPAGF~IOCF(Interrupt Enable Control Register) 18
3.3 GPIO Function Module 20
3.3.1 GPIO Register Description 20
RPAGE~R6(PORT6 Data Register) 20
IOPAGE~IOC6(P6 Direction Control Register) 20
IOPAGE~IOC9(Port Pull-up Or Pull-down Control Register) 20
IOPAGE~IOCB(Port Pull-down Control Register) 20
IOPAGE~IOCD(P6 Pull-up Control Register) 21
3.4 Timer Function Module 22
3.4.1 Timer Register Description 22
CONT (Control Register) 22
RPAGE~R1(TCC Time Clock/Counter) 24

RPAGE～RE(CPU Mode Controls Registers) 24
RPAGE～RF(Interrupt Flag Register) 24
IOPAGF～IOCF(Interrupt Enable Control Register) 25
3.4.2 TCC Timing Setup Instructions 25
3.5 Watchdog Function Module 26
3.5.1 Watchdog Register Description 26
IOPAGE～IOCE(WDT Enable Control Register) 26
3.5.2 Watchdog Setting Instructions 26
3.6 Port State Change Wake-up Function Module 27
3.6.1 Description Of Sleep Wake-up Mode 27
3.6.2 Port Status Change Wake-up Register Description 27
CONT（Control Register） 27
RPAGE～RD(P6 Port Interrupt Wake-up Enable Register) 27
RPAGE～RE(CPU Mode Controls Registers) 27
RPAGE～RF(Interrupt Flag Register) 28
IOPAGF～IOCF(Interrupt Enable Control Register) 28
3.6.3 Port Status Change Query Mode Wake-up Settings 28
3.6.4 Port Status Change Interrupt Wake-up Settings 29
3.7 Pulse Width Modulation Function Module 30
3.7.1 Pulse Width Modulation Register Description 30
RPAGE～R8(PWM Control Register) 30
RPAGE～R9(PWM Cycle Register) 30
RPAGE～RA(PWM1 Duty Register) 30
RPAGE～RB(PWM2 Duty Register) 31
RPAGE～RC(PWM3 Duty Register) 31
RPAGE～RE(CPU Mode Controls Registers) 31
RPAGE～RF(Interrupt Flag Register) 31
IOPAGF～IOCF(Interrupt Enable Control Register) 31
3.7.2 Pulse Width Modulation Setting Instructions 31
3.8 Interrupt Function Module 32
3.8.1 Interrupt Register Description 32
RPAGE～RF(Interrupt Flag Register) 32
IOPAGF～IOCF(Interrupt Enable Control Register) 34
3.9 Reset Function Module 35
3.9.1 Reset Function Overview 35
3.9.2 Power-on Reset 35
3.9.3 WDT Reset 36
3.9.4 LVR Low Voltage Reset 36
3.9.5 Relationship between Working Frequency and LVR Low Voltage Detection 37
3.9.6 Register Power Reset Value 39
3.10 System Clock Function Module 40
3.10.1 Internal RC Oscillator Mode（IRC） 40
3.10.2 External Crystal Oscillator / Ceramic Resonator（XT） 40
3.10.3 External RC Oscillator Mode（ERC） 41
4 CODE OPTION Register 42

5 Electrical Characteristics 45
5.1 Chip Limit Parameter 45
5.2 Chip DC Parameters 45
5.3 Characteristic curve 47
5.3.1 Internal low speed RC oscillator - voltage-frequency characteristic curve 47
5.3.2 Internal low speed RC oscillator - temperature - frequency characteristic curve 47
5.3.3 Internal 1Mhz RC oscillator - voltage-frequency characteristic curve 48
5.3.4 Internal 1Mhz RC oscillator - temperature - frequency characteristic curve 48
5.3.5 Internal 8 Mhz RC oscillator - voltage-frequency characteristic curve 49
5.3.6 Internal 8 Mhz RC oscillator - temperature - frequency characteristic curve 49
6 Package Size Information 50
6.1 8PIN Package Size 50
6.2 6PIN Package Size 51

1 General Description

1.1 Features

CPU configuration

- 1K×14-Bit OTP ROM
- 48×8-Bit SRAM
- 5-level stacks for subroutine nesting
- Less than 1.1 mA at 8MHz/5V
- Less than 20 μA at 32KHz/3V
- Less than 1 μA during Sleep mode

I/O port configuration

- 6 I/O ports
- P63 Configurable pull up and output
- Wake-up port:P6
- 6 programmable pull-high pins
- 5 programmable pull-down pins
- 6 programmable drive enhancement I/O pins
- External interrupt: P60

Operating voltage range

- Operating voltage range:
  1.8V～5.5V (0℃-70℃)
  2.3V～5.5V (-40℃-85℃)

Operating frequency range

- External crystals HXT, LXT
- Internal capacitor of external crystal oscillator:
  Disable、7Pf、9Pf、12.5Pf
- build-in RC oscillator:
  910KHz/1MHz/8MHz
- Choice of Clock Period Frequency Division:
  2Clock, 4Clock, 8Clock, 16Clock
  32Clock

Low voltage reset

- 1.2V±0.3V、1.6V±0.3V
- 1.8V±0.3V、2.4V±0.2V
- 2.7V±0.2V、3.1V±0.2V
- 3.3V±0.2V、3.6V±0.2V

Interrupt sources

- TCC overflow interrupt
- External interrupt
- Input-port status changed interrupt
- T1/PWM period match interrupt


Special features

- Programmable free running Watchdog Timer
  4.5ms、18ms、72ms、288ms
- 3 channels with same cycle 8Bit PWM
- 8Bit RTC/TCC


Package type

- JZ8P1520-DIP8;
- JZ8P1520-SOP8;
- JZ8P1520-SOT23-6;

1.2 Pin Assignment

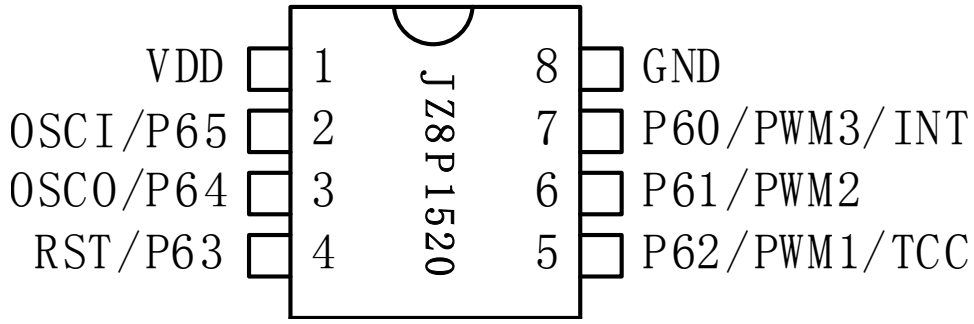

JZ8P1520-8PIN map

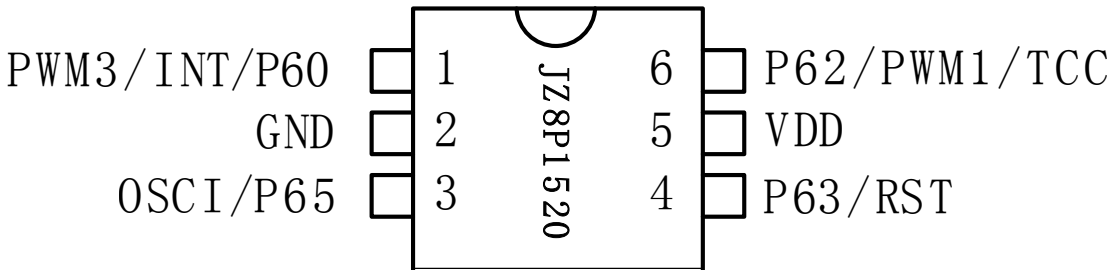


JZ8P1520-6PIN map

1.3 Pin Description

NUM	Name	I/O	Description
P60	P60	I/O (pull-up or pull-down)	GPIO, programmable pull-up, pull-down, high drive, port wake-up
	INT	I (SMT)	External interrupt input port
	PWM3	O	PWM3 output
P61	P61	I/O (pull-up or pull-down)	GPIO, programmable pull-up, pull-down, high drive, port wake-up
	PWM2	O	PWM2 output
P62	P62	I/O (pull-up or pull-down)	GPIO, programmable pull-up, pull-down, high drive, port wake-up
	TCC	I	External TCC signal source input pin
	PWM1	O	PWM1 output
P63	P63	I/O (pull-up)	GPIO, programmable pull-up, high drive, port wake-up
	RST	I (SMT)	Reset pin
P64	P64	I/O (pull-up or pull-down)	GPIO, programmable pull-up, pull-down, high drive, port wake-up
P65	P65	I/O (pull-up or pull-down)	GPIO, programmable pull-up, pull-down, high drive, port wake-up
	VDD	--	vdd
	VSS	--	gnd

2 Memory Structure

2.1 Program Memory Area

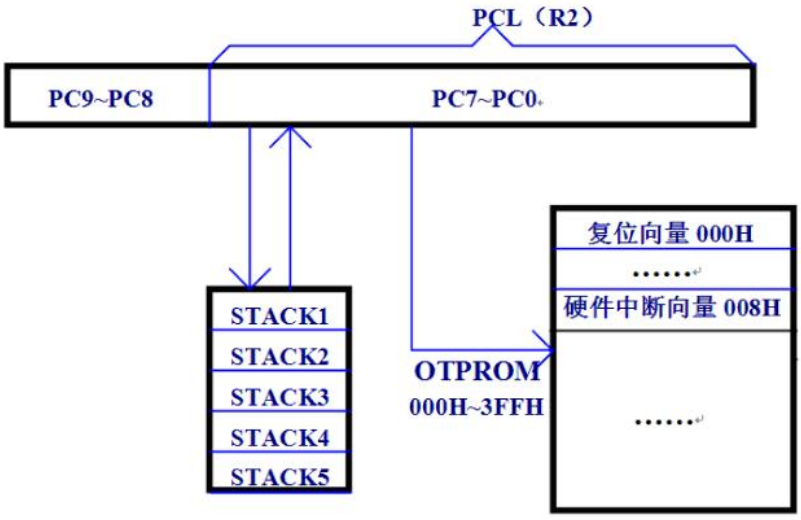

Program memory area structure

2.2 Data Memory Area

2.2.1 RPAGE\IOPAGE\Bank Data Register Area

Address	RPAGE Page register	IOPAGE Page register
0x00	R0 Indirect Addressing Register	Reserved
0x01	R1 Timer Clock Counter	CONT (Control Register)
0x02	R2 Program Counter	Reserved
0x03	R3 Status Register	Reserved
0x04	R4 FSR RAM Select Register	Reserved
0x05	Reserved	Reserved
0x06	R6 PORT6 Data Register	IOC6/P6CR（P6 Direction Control Register）
0x07	Reserved	Reserved

0x08	R8 PWM Control Register	Reserved
0x09	R9 PWM Cycle Register	IOC9/PHDCR（Port Pull-up Or Pull-down Control Register）
0x0A	RA PDT1 Duty Register	Reserved
0x0B	RB PDT2 Duty Register	IOCB/PDCR（Port Pull-down Control Register）
0x0C	RC PDT3 Duty Register	Reserved
0x0D	RD P6 Port Interrupt Wake-up Enable Register	IOCD/PHCR（Port6 Pull-up Control Register）
0x0E	RE CPU Mode Controls Registers	IOCE/WDE（WDT Enable Control Register）
0x0F	RF Interrupt Flag Register	IOCF/RIEN（Interrupt Enable Control Register）

3 Functional Description

3.1 Operational Registers

3.1.1 RPAGE～R0(Indirect Address Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
RIND<7:0>							

R0 is not a physically implemented register. It is used as an indirect address pointer. Any instruction using R0 as a pointer, actually accesses the data pointed by the low 6-bit RAMS<5:0> of RAM Select Register (R4).

3.1.2 RPAGE～R1(TCC Time Clock/Counter)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
TCC<7:0>							

TCC is an 8Bit Count-Up counter. An internal clock/external clock can be selected as the clock source. Count overflow can form an interrupt, and TCC can be read and written.

3.1.3 RPAGE～R2(PC Program Counter)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PCL<7:0>							

The program counter (PC) is a pointer for recording instructions to be processed by the CPU in each instruction cycle. During the CPU run cycle, the PC advances the instruction pointer to the program memory and then increments the pointer by one to advance to the next cycle.

3.1.4 RPAGE～R3(STATUS Status Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
RST	GB1	GB0	T	P	Z	DC	C

Bit<7>: RST: Bit of reset type:

0: if wake-up from other reset types.

1: if wake-up from sleep on pin change.

Bit<6:5>:GB1-GB0: Universal read-Write bit

Bit<4>: T- Time-out bit

0: WDT time-out

1: execute the "SLEP" and "WDTC" commands or during Low voltage reset

The events affecting T/P are shown in the following table:

Type	RST	T	P
Power on	0	1	1
/RESET during Operating mode	0	Hold	Hold
/RESET wake-up during Sleep mode	0	1	0
WDT time-out in working mode	0	0	Hold
Wakes up for WDT time-out	0	0	0

Wake-up on pin change during Sleep mode	1	1	0
WDTC instruction	Hold	1	1
SLEEP instruction	Hold	1	0

Bit<3>: P: Power-down bit:
0: execute "SLEP" command.
1: during power-on or by a "WDTC" command.
Bit<2>: Z: Zero flag:
0: if the result of an arithmetic or logic operation is zero.
1: if the result of an arithmetic or logic operation is not zero.
Bit<1>: DC: Auxiliary carry flag:
0: When the addition operation is performed, the lower four bits do not generate a carry or when the subtraction operation is performed, the lower four bits do not generate a borrow.
1: When the addition operation is performed, the lower four bits do not generate a carry or when the subtraction operation is performed, the lower four bits do not generate a borrow.
Bit<0>: C: Carry flag:
0: When the addition operation is performed, the upper four bits do not generate a carry or when the subtraction operation is performed, the upper four bits do not generate a borrow.
1: When the addition operation is performed, the upper four bits do not generate a carry or when the subtraction operation is performed, the upper four bits do not generate a borrow.

3.1.5 RPAGE～R4(FSR RAM Select Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1	1	FSR<5:0>					

FSR<5:0> Used to select a register (Address: 0X00~0X3F) in indirect addressing mode. The user can place the address corresponding to a register into the FSR. And then through accessing indirect addressing Register R0, the address will point to the register of the corresponding address in the FSR.

3.1.6 RPAGE～R6(PORT6 Data Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
P67	P66	P65	P64	P63	P62	P61	P60

Port input/output register, P6 port is 8 bit, R6 is a readable and writable register.

3.1.7 RPAGE～R8(PWM Control Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
T1EN	PWM3EN	PWM2EN	PWM1EN	T1PTEN	T1P<2:0>		

Bit<7>:T1EN-T1/PWM counter enable
1: Enable
0: Disable
Bit<6>:PWM3EN-PWM3 output enables control bits
1: Enable（P60 output PWM3）

0: Disable

Bit<5>:PWM2EN-PWM2 output enables control bits

1: Enable (P61 output PWM2)

0: Disable

Bit<4>:PWM1EN-PWM1 output enables control bits

1: Enable (P62 output PWM1)

0: Disable

Bit<3:0>:T1PTEN PT1P<2:0>-T1 frequency division selects the control bit

T1PTEN	PT1P<2>	PT1P<1>	PT1P<0>	T1 Frequency division ratio
0	0	0	0	1:1
1	0	0	0	1:2
1	0	0	1	1:4
1	0	1	0	1:8
1	0	1	1	1:16
1	1	0	0	1:32
1	1	0	1	1:64
1	1	1	0	1:128
1	1	1	1	1:256

3.1.8 RPAGE～R9(PWM Cycle Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PRD<7:0>							

T1/PWM Cycle Register

3.1.9 RPAGE～RA(PWM1 Duty Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PDC1<7:0>							

Bit<7:0>:PDC1<7:0>-PWM1 Duty Register

3.1.10 RPAGE～RB(PWM2 Duty Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PDC2<7:0>							

Bit<7:0>:PDC2<7:0>-PWM2 Duty Register

3.1.11 RPAGE～RC(PWM3 Duty Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PDC3<7:0>							

Bit<7:0>:PDC3<7:0>-PWM3 Duty Register

3.1.12 RPAGE～RD(P6 Port Interrupt Wake-up Enable Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	0	P6WK<5>	P6WK<4>	P6WK<3>	P6WK<2>	P6WK<1>	P6WK<0>

Bit<7:0>:P6WK<7:0>-P6 Port Interrupt Wake-up Enable

1: Enable

0: Disable(default)

Note: In OPTION for port wake-up setting, if P6 port is not independently controlled, port wake-up is not controlled by RD register; otherwise, the RD register needs to be processed, or the port cannot be woken up.

3.1.13 RPAGE～RE(CPU Mode Controls Registers)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
IPWM1	PWMCKS	TCCCKS	PWMWE	TCCWE	STPHX	CLKMD	IDLE

Bit<7>:IPWM1-PWMcomplementary output
1:PWM1 reverse phase output
0:PWM1 normal output
Bit<6>:PWMCKS-PWM clock source
1: Select system clock
0: Select the instruction cycle clock
Bit<5>:TCCCKS-TCC clock source
1: Select system clock
0: Select the instruction cycle clock
Bit<4>:PWMWE-PWM wake up
1:PWM wake up enable, can wake up IDLE mode
0:PWM wake up disable
Bit<3>:TCCWE-TCC wake up
1:TCC wake up enable, can wake up IDLE mode , RTC mode can wake up SLEEP and IDLE mode
0:TCC wake up disable
（Set TCCWE=1&RTCS=1 in RTC mode and LXT will continue to work when in SLEEP mode, otherwise LXT will stop when in SLEEP mode）
Bit<2>:STPHX- High-speed clock
1: Stop high speed clock, including IRC and crystal oscillator clock (excluding RTC clock)
0: The high speed clock is working properly
Bit<1>:CLKMD- System clock
1: The system clock uses a low speed RC oscillator clock
0: The system clock uses a high speed IRC or crystal oscillator clock
（When the system enters low speed mode from normal mode, set CLKMD=1 first, then set STPHX=1;When the system enters normal mode from low speed mode, STPHX=0 is set first, and CLKMD=0 is set later）
Bit<0>:IDLE-IDLE mode
1: When the system executes SLEEP instruction, it enters idle mode, and the system clock works normally
（TCC and PWM in idle mode, select the system clock can continue to work, and can wake up the system）
0: The system goes into SLEEP mode when it executes the SLEEP instruction

3.1.14 RPAGE～RF(Interrupt Flag Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	0	0	0	T1IF	EXIF	ICIF	TCIF

Bit<3>:T1IF-T1/PWM cycle interrupt flag bit, software clear 0
Bit<2>:EXIF-External interrupt flag bit (set 1 by drop edge of EXINT pin, software clear 0)

Bit<1>:ICIF-P6 Port state change interrupt flag bit, software clear 0
Bit<0>:TCIF-TCC interrupt flag bit, software clear 0
1: interrupt request
0: no interrupt occurs
Note: "MOV RF, A" should be used to clear the interrupt flag. BTC/AND RF, A instructions should not be used.

3.2 Control Register

3.2.1 CONT (Control Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
RTCS	INT	TS	TE	PAB	PSR2	PSR1	PSR0

Bit<7>:RTCS

When RTC is closed in OPTION, as a common read and write bit;

When RTC is enabled in OPTION:

1: Select external crystal oscillator clock (LXT four-frequency clock)

0: TCC clock is determined by TCCCKS and TS, TCCCKS=1 clock source selects FOSC, TCCCKS=0 clock source is determined by TS, TCC clock source priority RTCS >TCCCKS >TS

Bit<6>:INT- Interrupt enable flag

0: Disable interrupts by instruction or hardware

1: Enable interrupts by instruction

Bit<5>:TS-TCC signal source selection bit

0: Internal instruction cycle clock

1: External input signal (P62 needs to be set as input)

Bit<4>:TE-TCC signal edge selection bit

0: TCC pin signal changes from low to high plus 1

1: TCC pin signal changes from high to low plus 1

Bit<3>:PAB- Prescaler allocation bit

0: Prescaler is assigned to TCC

1: Prescaler is assigned to WDT

Bit<2:0>PSR2～PSR0: TCC/WDT Prescaler selection control bit:

PSR2	PSR1	PSR0	TCC Rate	WDT Rate
0	0	0	1:2	1:1
0	0	1	1:4	1:2
0	1	0	1:8	1:4
0	1	1	1:16	1:8
1	0	0	1:32	1:16
1	0	1	1:64	1:32
1	1	0	1:128	1:64
1	1	1	1:256	1:128

CONT is a readable and writable register

3.2.2 IOPAGE～IOC6(P6 Direction Control Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1	1	P6CR<5>	P6CR<4>	P6CR<3>	P6CR<2>	P6CR<1>	P6CR<0>

Port6 direction control bit

1: input (default)

0: output

3.2.3 IOPAGE～IOC9(Port Pull-up Or Pull-down Control Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1	1	P6PD<5>	P6PD<4>	1	1	1	1

Bit<5:4>:P6<5:4> Pull-down enable control
0: Enable
1: Disable (default)

3.2.4 IOPAGE～IOCB(Port Pull-down Control Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1	P6PD<2>	P6PD<1>	P6PD<0>	1	1	1	1

Bit<6:4>:P6<2:0> Pull-down enable control
0: Enable
1: Disable (default)

3.2.5 IOPAGE～IOCD(P6 Pull-up Control Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1	1	P6PH<5>	P6PH<4>	P6PH<3>	P6PH<2>	P6PH<1>	P6PH<0>

P6 port pull-up control
0: Enable
1: Disable (default)
Note: The P6PH<3> software pull-up function is valid only when the function enhancement and wake-up independent control are all enabled in OPTION.

3.2.6 IOPAGE～IOCE(WDT Enable Control Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
WDTEN	EIS	1	1	1	1	1	1

Bit<7>:WDTEN-WDT enable control
0: Disable (default)
1: Enable
Bit<6>:EIS-P60 external interrupt enable bit
0: Disable, P60 is GPIO.
1: Enable, The I/O control bit for P60 must be set as input.

3.2.7 IOPAGF～IOCF(Interrupt Enable Control Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	0	0	0	T1IE	EXIE	ICIE	TCIE

Bit<3>:T1IE-T1 interrupt enable control
1: Enable
0: Disable (default)
Bit<2>:EXIE- External interrupt enable control
1: Enable
0: Disable (default)
Bit<1>:ICIE- P6 port status change interrupt enable control
1: Enable

0: Disable (default)

Bit<0>:TCIE- TCC overflow interrupt enable control

1: Enable

0: Disable (default)

3.3 GPIO Function Module

JZ8P1520 has one set of bidirectional I/O ports, a total of 6 inputs and 6outputs, most of which can be reused for other functions.

6 programmable pull-high I/O pins:P6.0～P6.5;

5 programmable pull-down I/O pins:P6.0～P6.2,P6.4～P6.5;

6 programmable driver enhanced I/O pins:P6.0～P6.5; （Port driven enhancements need to be set in OPTION）

The port input characteristics table is as follows:

Pins	SMT	HSMT	EMT	INV
P6.3	0.55*VDD	0.2*VDD/0.8*VDD	0.2*VDD/0.35*VDD	0.55*VDD
P6.0～P6.2	0.2*VDD/0.6*VDD	0.2*VDD/0.8*VDD	0.2*VDD/0.35*VDD	0.55*VDD
P6.4～P6.5	0.2*VDD/0.6*VDD	0.2*VDD/0.8*VDD	0.36*VDD	0.55*VDD

The above data are for reference , please refer to the actual prototype test.

3.3.1 GPIO Register Description

RPAGE～R6(PORT6 Data Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	0	P65	P64	P63	P62	P61	P60

Port input/output register, 8 bits.

R6 is a readable and writable register.

IOPAGE～IOC6(P6 Direction Control Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1	1	P6CR<5>	P6CR<4>	P6CR<3>	P6CR<2>	P6CR<1>	P6CR<0>

Port6 direction control bit

1: input (default)

0: output

IOPAGE～IOC9(Port Pull-up Or Pull-down Control Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1	1	P6PD<5>	P6PD<4>	1	1	1	1

Bit<5:4>:P6<5:4> Pull-down enable control

0: Enable

1: Disable (default)

IOPAGE～IOCB(Port Pull-down Control Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1	P6PD<2>	P6PD<1>	P6PD<0>	1	1	1	1

Bit<6:4>:P6<2:0> Pull-down enable control

0: Enable

1: Disable (default)

IOPAGE～IOCD(P6 Pull-up Control Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1	1	P6PH<5>	P6PH<4>	P6PH<3>	P6PH<2>	P6PH<1>	P6PH<0>

P6 port pull-up control

0: Enable

1: Disable (default)

3.4 Timer Function Module

There is an 8-bit counter available as prescalers for the TCC and WDT respectively. Clock source can be either internal system clock (rising edge triggering), or external clock (input by TCC pin, triggering edge optional). If there is no frequency division control, each clock (Fm/Fs) cycle (select internal clock) or each external clock cycle (external clock) can be added to the counter by 1.

The system provides an 8-Bit counter as the prescaler of TCC. TCC prescaler, trigger edge and clock can be set by CONT register.

Note: "MOV RF, A" should be used to clear the interrupt flag. BTC/AND RF, A instructions should not be used.

3.4.1 Timer Register Description

CONT (Control Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
RTCS	INT	TS	TE	PAB	PSR2	PSR1	PSR0

Bit<7>:RTCS

When RTC is closed in OPTION, as a common read and write bit;

When RTC is enabled in OPTION:

1: Select external crystal oscillator clock (LXT four-frequency clock)

0: TCC clock is determined by TCCCKS and TS, TCCCKS=1 clock source selects FOSC, TCCCKS=0 clock source is determined by TS, TCC clock source priority RTCS >TCCCKS >TS

Bit<6>:INT- Interrupt enable flag

0: Disable interrupts by instruction or hardware

1: Enable interrupts by instruction

Bit<5>:TS-TCC signal source selection bit

0: Internal instruction cycle clock

1: External input signal (P62 needs to be set as input)

Bit<4>:TE-TCC signal edge selection bit

0: TCC pin signal changes from low to high plus 1

1: TCC pin signal changes from high to low plus 1

Bit<3>:PAB- Prescaler allocation bit

0: Prescaler is assigned to TCC

1: Prescaler is assigned to WDT

Bit<2:0>PSR2～PSR0: TCC/WDT Prescaler selection control bit:

PSR2	PSR1	PSR0	TCC Rate	WDT Rate
0	0	0	1:2	1:1
0	0	1	1:4	1:2
0	1	0	1:8	1:4
0	1	1	1:16	1:8
1	0	0	1:32	1:16
1	0	1	1:64	1:32
1	1	0	1:128	1:64

1	1	1	1:256	1:128

RPAGE~R1(TCC Time Clock/Counter)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
TCC<7:0>							

TCC is an 8Bit Count-Up counter. An internal clock/external clock can be selected as the clock source. Count overflow can form an interrupt, and TCC can be read and written.

RPAGE~RE(CPU Mode Controls Registers)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
IPWM1	PWMCKS	TCCCKS	PWMWE	TCCWE	STPHX	CLKMD	IDLE

Bit<5>:TCCCKS-TCC clock source

1: Select system clock

0: Select the instruction cycle clock

Bit<3>:TCCWE-TCC wake up

1:TCC wake up enable, can wake up IDLE mode , RTC mode can wake up SLEEP and IDLE mode

0:TCC wake up disable

(Set TCCWE=1&RTCS=1 in RTC mode and LXT will continue to work when in SLEEP mode, otherwise LXT will stop when in SLEEP mode)

Bit<2>:STPHX- High-speed clock

1: Stop high speed clock, including IRC and crystal oscillator clock (excluding RTC clock)

0: The high speed clock is working properly

Bit<1>:CLKMD- System clock

1: The system clock uses a low speed RC oscillator clock

0: The system clock uses a high speed IRC or crystal oscillator clock

(When the system enters low speed mode from normal mode, set CLKMD=1 first, then set STPHX=1;When the system enters normal mode from low speed mode, STPHX=0 is set first, and CLKMD=0 is set later)

Bit<0>:IDLE-IDLE mode

1: When the system executes SLEEP instruction, it enters idle mode, and the system clock works normally

(TCC and PWM in idle mode, select the system clock can continue to work, and can wake up the system)

0: The system goes into SLEEP mode when it executes the SLEEP instruction

RPAGE~RF(Interrupt Flag Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
-	-	-	-	T1IF	EXIF	ICIF	TCIF

Bit<0>:TCIF-TCC interrupt flag bit, software clear 0

1: interrupt request

0: no interrupt occurs

Note: "MOV RF, A" should be used to clear the interrupt flag. "BTC/AND RF, A" instructions should not be used.

IOPAGF～IOCF(Interrupt Enable Control Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	0	0	0	T1IE	EXIE	ICIE	TCIE

Bit<0>:TCIE- TCC overflow interrupt enable control

1: Enable

0: Disable (default)

3.4.2 TCC Timing Setup Instructions

1. Assign initial values to TCC registers.
2. Set the value of the CONT registers (select as a timer or counter and pre-divider ratio).
3. As a counter, it is necessary to select positive or negative edge plus 1 for TCC external irrigation signal in CONT register.
4. If interrupt function is needed, TCIE (Bit0) in IOCF register should be set to 1, and ENI instruction should be executed./
5. The interrupt program will manually save ACC, STATUS and R4 in the stack. After executing RETI instructions, the interrupt program will be popped from the stack. Before exiting the interrupt, the TCC interrupt flag should be clear.

3.5 Watchdog Function Module

WDT is a 12-Bit count-up counter with two enabling control signals (WDTEN in OPTION and WDTEN control bit in IOCE register). The counting clock is provided by a separate oscillator, so the WDT can still run (if enabled) after the system enters the sleep mode. In normal mode or sleep mode, the overflow of WDT can reset the system, and the reset time is selected by the control bit WDTPS in OPTION for 4.5ms、18ms、72ms or 288ms.

The system provides an 8-Bit counter as a prescaler for WDT, which is set by CONT registers.

Whether in simulation or in burning, in order to enable WDT function, it is necessary to select Enable at the WDT bit of Code Option register, and then select "1" at the WDTE bit of WDT control register. Two conditions are indispensable. The counting frequency of watchdog timer (WDT) comes from the internal RC oscillator. The counting frequency is about 15 kHz (+30%). When MCU enters Sleep mode, because the power supply to RC oscillator is not turned off, WDT is still counting. When WDT overflows, MCU will be awakened and reset.

3.5.1 Watchdog Register Description

IOPAGE～IOCE(WDT Enable Control Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
WDTEN	EIS	1	1	1	1	1	1

Bit7:WDTEN-WDT enable control

1: Enable

0: Disable (default)

3.5.2 Watchdog Setting Instructions

1. Set Bit7 (WDTEN) bit in IOCE register and choose whether to use WDT or not.
2. Setting prescaler rate by setting Bit2-Bit0 bits of CONT register;
3. If WDT wake-up is enabled, it is recommended that customers prohibit other wake-up. Reasons: WDT wake-up and other wake-up enablers, when the application of WDT function wakes up at the same time, IC will give priority to reset, not to implement other wake-up procedures, so if enabling WDT wake-up, it is recommended that customers prohibit other wake-up.

3.6 Port State Change Wake-up Function Module

3.6.1 Description Of Sleep Wake-up Mode

The chip executes the "SLEEP" instruction to go to sleep mode (low power mode). When entering sleep mode, the system clock stops, all modules stop working, and the WDT (if enabled) is cleared to 0, but continues to run.

The microcontroller can be awakened as follows:

1、WDT reset wakes up;

2、RTC wake up;

3、The port status changes wake up;

The latter two methods maintain the continuity of the program, and can continue the original process (DISI before SLEEP) or perform the corresponding jump (ENI before SLEEP), and open the corresponding enabling control bit, jump to the position of the interrupt vector. Mainly describes the port change wake-up, other wake-up methods will be explained in the corresponding module.

Note: "MOV RF, A" should be used to clear the interrupt flag. BTC/AND RF, A instructions should not be used.

3.6.2 Port Status Change Wake-up Register Description

CONT (Control Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
RTCS	INT	TS	TE	PAB	PSR2	PSR1	PSR0

Bit<7>:RTCS

When RTC is closed in OPTION, as a common read and write bit;

When RTC is enabled in OPTION:

1: Select external crystal oscillator clock (LXT four-frequency clock)

0: TCC clock is determined by TCCCKS and TS, TCCCKS=1 clock source selects FOSC, TCCCKS=0 clock source is determined by TS, TCC clock source priority RTCS >TCCCKS >TS

RPAGE～RD(P6 Port Interrupt Wake-up Enable Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	0	P6WK<5>	P6WK<4>	P6WK<3>	P6WK<2>	P6WK<1>	P6WK<0>

Bit<5:0>:P6WK<5:0>-P6 Port Interrupt Wake-up Enable

1: Enable

0: Disable(default)

Note: In OPTION for port wake-up setting, if P6 port is not independently controlled, port wake-up is not controlled by RD register; otherwise, the RD register needs to be processed, or the port cannot be woken up.

RPAGE～RE(CPU Mode Controls Registers)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
IPWM1	PWMCKS	TCCCKS	PWMWE	TCCWE	STPHX	CLKMD	IDLE

Bit<6>:PWMCKS-PWM clock source

1: Select system clock

0: Select the instruction cycle clock

Bit<5>:TCCCKS-TCC clock source
1: Select system clock
0: Select the instruction cycle clock
Bit<4>:PWMWE-PWM wake up
1:PWM wake up enable, can wake up IDLE mode
0:PWM wake up disable
Bit<3>:TCCWE-TCC wake up
1:TCC wake up enable, can wake up IDLE mode , RTC mode can wake up SLEEP and IDLE mode
0:TCC wake up disable
（Set TCCWE=1&RTCS=1 in RTC mode and LXT will continue to work when in SLEEP mode, otherwise LXT will stop when in SLEEP mode）
Bit<2>:STPHX- High-speed clock
1: Stop high speed clock, including IRC and crystal oscillator clock (excluding RTC clock)
0: The high speed clock is working properly
Bit<1>:CLKMD- System clock
1: The system clock uses a low speed RC oscillator clock
0: The system clock uses a high speed IRC or crystal oscillator clock
（When the system enters low speed mode from normal mode, set CLKMD=1 first, then set STPHX=1;When the system enters normal mode from low speed mode, STPHX=0 is set first, and CLKMD=0 is set later）
Bit<0>:IDLE-IDLE mode
1: When the system executes SLEEP instruction, it enters idle mode, and the system clock works normally
（TCC and PWM in idle mode, select the system clock can continue to work, and can wake up the system）
0: The system goes into SLEEP mode when it executes the SLEEP instruction

RPAGE～RF(Interrupt Flag Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	0	0	0	T1IF	EXIF	ICIF	TCIF

Bit<1>:ICIF-P6 Port state change interrupt flag bit, software clear 0
1: interrupt request
0: no interrupt occurs

IOPAGF～IOCF(Interrupt Enable Control Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	0	0	0	T1IE	EXIE	ICIE	TCIE

Bit<1>:ICIE- P6 port status change interrupt enable control
1: Enable
0: Disable (default)

3.6.3 Port Status Change Query Mode Wake-up Settings

1、PORT6 port wake-up port is set as input;

2、The internal pull-up or pull-down of the wake-up port can be selected according to the need;
3、Enable PORT6 port status change interrupt;
4、Enabling port state change independent interrupt and wake-up control;
5、Execute DISI instructions and do not enter the interrupt address port;
6、Execute the "SLEP" instruction and enter the sleep mode;
7、After waking up, execute the next instruction of SLEP.

3.6.4 Port Status Change Interrupt Wake-up Settings

1、PORT6 port wake-up port is set as input;
2、The internal pull-up or pull-down of the wake-up port can be selected according to the need;
3、Enable PORT6 port status change interrupt;
4、Enabling port state change independent interrupt and wake-up control;
5、Execute "ENI" instructions and wait to enter the interrupt address port;
6、Instruct "SLEP" and enter the sleep mode;
7、After waking up, it will enter the interrupt address port. After exiting the interrupt, it will execute the next instruction of SLEP.

3.7 Pulse Width Modulation Function Module

JZ8P1520 provides three PWM signals of the same period, where the accuracy of PWM1, PWM2 and PWM3 is 8 bits. The PWM output waveform is determined by the period and duty cycle, and the transmission rate is the reciprocal of the period.

3.7.1 Pulse Width Modulation Register Description

RPAGE～R8(PWM Control Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
T1EN	PWM3EN	PWM2EN	PWM1EN	T1PTEN	T1P<2:0>		

Bit<7>:T1EN-T1/PWM counter enable
1: Enable
0: Disable
Bit<6>:PWM3EN-PWM3 output enables control bits
1: Enable（P60 output PWM3）
0: Disable
Bit<5>:PWM2EN-PWM2 output enables control bits
1: Enable（P61 output PWM2）
0: Disable
Bit<4>:PWM1EN-PWM1 output enables control bits
1: Enable（P62 output PWM1）
0: Disable
Bit<3:0>:T1PTEN PT1P<2:0>-T1 frequency division selects the control bit

T1PTEN	PT1P<2>	PT1P<1>	PT1P<0>	T1 Frequency rate
0	0	0	0	1:1
1	0	0	0	1:2
1	0	0	1	1:4
1	0	1	0	1:8
1	0	1	1	1:16
1	1	0	0	1:32
1	1	0	1	1:64
1	1	1	0	1:128
1	1	1	1	1:256

RPAGE～R9(PWM Cycle Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PRD<7:0>							

T1/PWM Cycle Register

RPAGE～RA(PWM1 Duty Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PDC1<7:0>							

Bit<7:0>:PDC1<7:0>-PWM1 Duty Register

RPAGE～RB(PWM2 Duty Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PDC2<7:0>							

Bit<7:0>:PDC2<7:0>-PWM2 Duty Register

RPAGE～RC(PWM3 Duty Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PDC3<7:0>							

Bit<7:0>:PDC3<7:0>-PWM3 Duty Register

RPAGE～RE(CPU Mode Controls Registers)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
IPWM1	PWMCKS	TCCCKS	PWMWE	TCCWE	STPHX	CLKMD	IDLE

Bit<7>:IPWM1-PWMcomplementary output
1:PWM1 reverse phase output
0:PWM1 normal output
Bit<6>:PWMCKS-PWM clock source
1: Select system clock
0: Select the instruction cycle clock
Bit<4>:PWMWE-PWM wake up
1:PWM wake up enable, can wake up IDLE mode
0:PWM wake up disable

RPAGE～RF(Interrupt Flag Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	0	0	0	T1IF	EXIF	ICIF	TCIF

Bit<3>:T1IF-T1/PWM cycle interrupt flag bit, software clear 0
Note: "MOV RF, A" should be used to clear the interrupt flag. BTC/AND RF, A instructions should not be used.

IOPAGF～IOCF(Interrupt Enable Control Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	0	0	0	T1IE	EXIE	ICIE	TCIE

Bit<3>:T1IE-T1 interrupt enable control
1: Enable
0: Disable (default)

3.7.2 Pulse Width Modulation Setting Instructions

1、 Set the PWMCON register, select the corresponding timer as the PWM mode, the timer division ratio, the timer interrupt type (if the PWM interrupt is enabled), the clock source of the timer, etc.
2、Write the value of the RPAGE-R9 register to determine the Period of the PWM channel;
3、Write the value of the PDCX register to determine the Duty of the PWM channel;
4、Enable the corresponding timer;
5、Enable or disable the timer interrupt corresponding to PWM and execute the "ENI" or "DISI" instruction (if needed).


3.8 Interrupt Function Module

JZ8P1520 has 4 interrupt sources. Regardless of which interrupt is used, the total interrupt must be enabled, and the "ENI" instruction is executed. The following are the characteristics of each interrupt, the interrupt address and the priority level:

	Interrupt Sources	Enable Condition	Interrupt Flag	Interrupt vector
External	External Interrupt	EI + EXIE = 1	EXIF	008H
External	Port input status change	EI + ICIE = 1	ICIF	008H
Internal	TCC overflow interrupt	EI + TCIE = 1	TCIF	008H
Internal	T1/PWM cycle interrupt	EI + T1IE = 1	T1IF	008H

RPAGE~RF are interrupt status flag registers that record the value of the interrupt flag bit when an interrupt generates an interrupt request. IOPAGF～IOCF are interrupt setting registers. The enable and disable of interrupts are set in these two registers. The total interrupt is enabled by executing the "ENI" instruction. Conversely, the total interrupt is disabled by the "DISI" instruction. When an interrupt is generated, its next instruction will be executed from their specific address. The corresponding interrupt flag must be cleared before leaving the interrupt service routine to avoid interrupted malfunctions.

When the interrupt subroutine is executed, the contents of ACC, R3, and R4 need to be kept manually. After the subroutine is completed, we need to load the saved values into ACC, R3, R4 manually. This is to avoid changing the values of ACC, R3, and R4 when the interrupt subroutine is executed, resulting in an error when returning to the main program. As shown below:

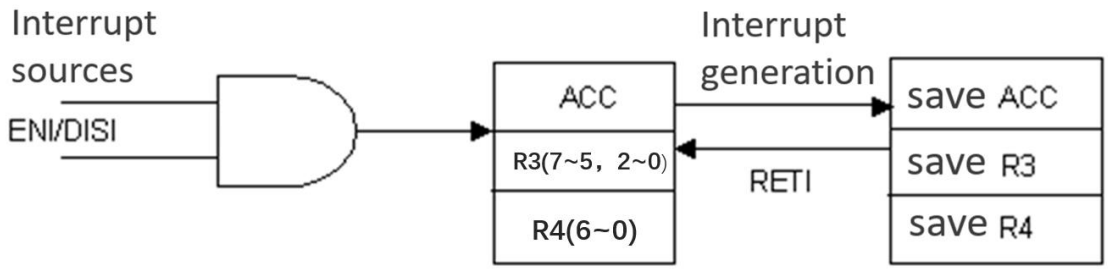

3.8.1 Interrupt Register Description

RPAGE～RF(Interrupt Flag Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
-	-	-	-	T1IF	EXIF	ICIF	TCIF

Bit<3>:T1IF-T1/PWM cycle interrupt flag bit, software clear 0

Bit<2>:EXIF-External interrupt flag bit (set 1 by drop edge of EXINT pin, software clear 0)
Bit<1>:ICIF-P6 Port state change interrupt flag bit, software clear 0
Bit<0>:TCIF-TCC interrupt flag bit, software clear 0
1: interrupt request
0: no interrupt occurs
Note: "MOV RF, A" should be used to clear the interrupt flag. BTC/AND RF, A instructions should not be used.

IOPAGF～IOCF(Interrupt Enable Control Register)

Bit 7	Bit6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	0	0	0	T1IE	EXIE	ICIE	TCIE

Bit<3>:T1IE-T1 interrupt enable control
1: Enable
0: Disable (default)
Bit<2>:EXIE- External interrupt enable control
1: Enable
0: Disable (default)
Bit<1>:ICIE- P6 port status change interrupt enable control
1: Enable
0: Disable (default)
Bit<0>:TCIE- TCC overflow interrupt enable control
1: Enable
0: Disable (default)

3.9 Reset Function Module

3.9.1 Reset Function Overview

JZ8P1520 chip provides 3 reset modes:

1、Power-on reset and Low voltage reset;

2、RESET pin input low level reset;

3、WDT overflow reset;

The first reset time is determined by the SUT in OPTION, as shown in the following table:

Power-on reset setup time:

SUT	Reset setup time
PWRT=WDT=18ms	Reset setup time = 18ms
PWRT=WDT=4.5ms	Reset setup time = 4.5ms
PWRT=WDT=72ms	Reset setup time = 72ms
PWRT=WDT=288ms	Reset setup time = 288ms
PWRT=140us WDT=18ms	Reset setup time =140us
PWRT=140us WDT=4.5ms	Reset setup time =140us
PWRT=140us WDT=72ms	Reset setup time =140us
PWRT=140us WDT=288ms	Reset setup time =140us

When any of the above resets occur, all system registers are restored to their default state, the program stops running, and the program counter PC is cleared. After the reset is complete, the system restarts from vector 0000H.

Any kind of reset situation requires a certain response time, and the system provides a complete reset process to ensure the smooth operation of the reset action. For different types of oscillators, the time required to complete the reset is different. Therefore, the rising speed of VDD and the start-up time of different crystals are not fixed. The RC oscillator has the shortest start-up time and the crystal oscillator has a longer start-up time. In the process of using the user terminal, the requirements of the host for the power-on reset time should be considered.

3.9.2 Power-on Reset

Power-on reset is closely related to LVR operation. The process of powering on the system is in the form of a gradually rising curve, which takes a certain amount of time to reach the normal level.

Power-on: The system detects that the power supply voltage has risen and waits for it to stabilize;

External Reset (External Reset Pin Enable Only): The system detects the status of the external reset pin. If not high level, the system remains in reset until the external reset pin is released;

System initialization: all system registers are set to initial values;

The oscillator starts working: the oscillator starts to provide the system clock;

Execution procedure: At the end of power-on, the program starts running.

3.9.3 WDT Reset

The watchdog reset is a protection setting for the system. In the normal state, the watchdog timer is cleared by the program. If an error occurs, the system is in an unknown state and the watchdog timer overflows and the system is reset. After the WTD reset, the system restarts to the normal state.

Watchdog timer status: The system detects if the watchdog timer overflows. If it overflows, the system resets.

System initialization: all system registers are set to the default state;

The oscillator starts working: the oscillator starts to provide the system clock;


Execution procedure: At the end of power-on, the program starts running.

Watchdog Timer Application Notes:

- Checking the status of the I/O port and the contents of the RAM before the watchdog is cleared which can improve the reliability of the program before the watchdog is cleared.
- The watchdog cannot be cleared in the interrupt; otherwise the main program cannot be detected.
- The program should only have the action of clearing the watchdog in the main program. This architecture can maximize the protection function of the watchdog.

3.9.4 LVR Low Voltage Reset

Power-down reset, system voltage dip caused by external factors (for example, interference or changes in external load). A brown-out may cause the system to malfunction or program execution errors.

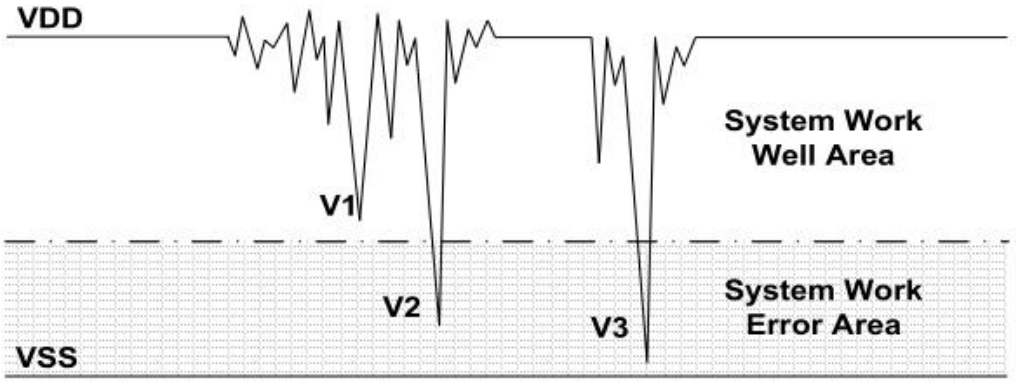

Voltage drops can enter the system dead zone. The system dead zone means that the power supply does not meet the minimum operating voltage requirements of the system. The figure above is a typical power-down reset diagram. In the figure, VDD is severely disturbed and the voltage drop is very low. The system above the dotted line works normally. In the area below the dotted line, the system enters an unknown working state. This area is called the dead zone. When VDD falls to V1, the system is still in a normal state; when VDD falls to V2 and V3, the system enters the dead zone, which is easy to cause an error. The system may enter the dead zone in the following cases:

DC application:

In DC applications, battery power is generally used. When the battery voltage is too low or the microcontroller drives the load, the system voltage may drop and enter the dead zone. At this time, the power supply does not fall further to the LVD detection voltage, so the system remains in the dead zone.


AC application:

When the system is powered by AC, the DC voltage value is affected by noise in the AC power supply. When the external load is too high, such as driving the motor, the interference caused by the load action also affects the DC power supply. If VDD falls below the minimum operating voltage due to interference, the system may enter unstable operation.

In the AC application, the system has a long time to power on and off. Among them, the power-on sequence protection makes the system power on normally, but the power-off process is similar to that in the DC operation. After the AC power is turned off, the VDD voltage is easy to enter the dead zone during the slow decline.

3.9.5 Relationship between Working Frequency and LVR Low Voltage Detection

In order to improve the performance of the system power-down reset, it is necessary to clarify that the system has the minimum operating voltage value. The minimum operating voltage of the system is related to the system execution speed, and the minimum operating voltage value is different at different execution speeds.

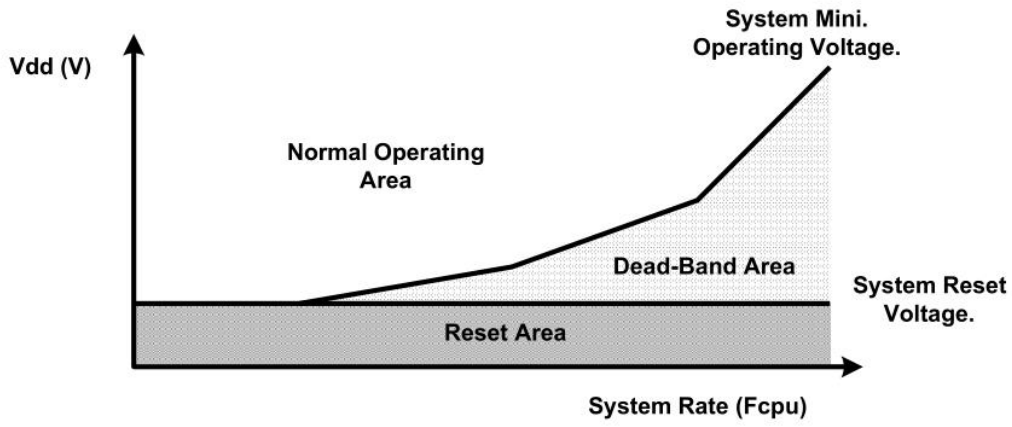

As shown in the figure above, the normal operating voltage range of the system is generally higher than the system reset voltage, and the reset voltage is determined by the low voltage detection (LVR) level. When the system execution speed is increased, the minimum operating voltage of the system is also increased accordingly. However, since the system reset voltage is fixed, a voltage region will appear between the system minimum operating voltage and the system reset voltage, and the system will not work normally or reset, this area is the dead zone.

To avoid dead band voltage, select the appropriate LVR reset voltage point when selecting the operating frequency. The following table:

Operating Frequency	LVR Reset Voltage Point
IRC-8M, 2Clock	LVR=2.7V
IRC-8M, 4Clock	LVR=2.4V

IRC-8M,8Clock	LVR=1.8V
IRC-1M,2Clock	LVR=1.8V
IRC-910KHz,2Clock	LVR=1.8V

Note: The corresponding value of this operating frequency and LVR reset voltage point is only the recommended value. During the use, the reset voltage point can be adjusted appropriately according to the specific application.

3.9.6 Register Power Reset Value

Address	Register	Reset Value	Address	Register	Reset Value
0x0	R0	-	0x0	-	-
0x1	R1(TCC)	0000 0000	0x1	-	-
0x2	R2(PC)	0000 0000	0x2	CONT	0011 1111
0x3	R3(STATUS)	0001 1uuu	0x3	-	-
0x4	RSR	11uu uuuu	0x4	-	-
0x5	-	-	0x5	-	-
0x6	PORT6	0011 1111	0x6	IOC6	1111 1111
0x7	LVDCON	0000 0000	0x7	-	-
0x8	PWMCON	0000 0000	0x8	-	-
0x9	PRD	0000 0000	0x9	PHDCR	1111 1111
0xA	PDC1	0000 0000	0xA	-	-
0xB	PDC2	0000 0000	0xB	PDCR	1111 1111
0xC	PDC3	0000 0000	0xC	-	-
0xD	ICIECR	0000 0000	0xD	PHCR	1111 1111
0xE	CPUCON	0000 0000	0xE	WDTCR	1011 1111
0xF	RIFG	0000 0000	0xF	RIEN	0000 1111
0x10~0x3f	General purpose register	uuuu uuuu			

U= Unknown state;

3.10 System Clock Function Module

JZ8P1520 integrates three oscillators internally and can be configured with OPTION. See the following table for details:

Oscillator Type	Description
IRC (Built-in RC oscillator)	P64:GPIO; P65:GPIO
LXT (Low speed crystal)	
HXT (High speed crystal)	

Note: The system frequency transition point between HXT and LXT is around 400 kHz.

3.10.1 Internal RC Oscillator Mode (IRC)

JZ8P1520 provides internal RC mode with frequency options of 1MHz and 8MHz.

IRC working frequency can be selected by setting the configuration bit of OPTION, and the corresponding relationship is as follows:


Firc	IRC Frequency
8 M	IRC frequency is 8MHz
1 M	IRC frequency is 1MHz
910 KHz	IRC frequency is 910KHz

JZ8P1520 provides a variety of frequency division options, which can be selected in OPTION, suitable for more occasions. The following table:

Clocks	Clocks Frequency Division
2clock	Frequency division is 2clock
4clock	Frequency division is 4clock
8clock	Frequency division is 8clock
16clock	Frequency division is 16clock
32clock	Frequency division is 32clock

3.10.2 External Crystal Oscillator / Ceramic Resonator (XT)

In most applications, crystals or ceramic resonators can be connected to the OSCO and OSCI to generate oscillation. The circuit diagram is as follows. Both HXT and LXT models are applicable. The recommended values for C1 and C2 are shown in the table. Due to the different characteristics of each resonator, the user should select the appropriate values of C1 and C2 with reference to their specifications.

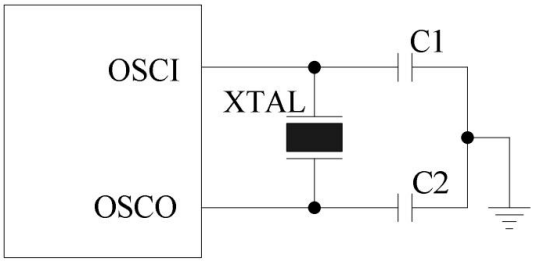

Crystal/oscillator circuit


Capacitor selection reference for crystal oscillator or ceramic oscillator:

Oscillator mode	Frequency mode	Frequency	C1(pF)	C2(pF)
ceramic oscillator	HXT	455KHz	100-200	100-200
crystal oscillator	LXT	32.768KHz	5-40	5-40
	HXT	1 MHz	5-30	5-30
		4 MHz	5-30	5-30

Note: The above data is for reference only. Please use the physical test for all use.

JZ8P1520 can also be driven by the external clock signal on the OSCI pin. Its application is as

Follows:

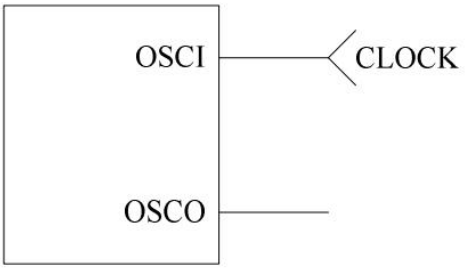

External clock schematic

3.10.3 External RC Oscillator Mode (ERC)

In some applications where clock accuracy is not critical, the use of an RC oscillator can save some cost. However, it should be noted that the frequency of the RC oscillator is related with the voltage, the resistance value (Rext), and the capacitance value (Cext), even the operating temperature. In addition, due to the difference in production process between the chips, the frequency will also change slightly.

When using external clock input, clock signal is input from OSCI, OSCO can be suspended;

When using an external oscillator and it is greater than 400KHz, you must select an external high-speed oscillator in the OPTION when writing programs. If it is less than 400KHz, select an external low-speed oscillator.

JZ8P1520 can provide built-in capacitors of 7pf, 9pf and 12.5pf. When selecting RTC mode, the corresponding configuration can be made in the option of burning.

4 CODE OPTION Register

CODE OPTION	Option	Description of function
WTD	Enable	WDT is enabled
	Disable	WDT is disabled(default)
Clocks Frequency Division	2 Clocks	Instruction cycle selects 2 clock
	4 Clocks	Instruction cycle selects 4 clock
	8 Clocks	Instruction cycle selects 8 clock
	16 Clocks	Instruction cycle selects16 clock
	32 Clocks	Instruction cycle selects 32 clock
Oscillation Mode	IRC mode	Select internal RC oscillation mode
	HXT mode	Select low speed XT oscillation mode
	LXT mode	Select high speed XT oscillation mode
IRC Frequency	8M	IRC frequency selects 8M
	1M	IRC frequency selects 1M
	910KHz	IRC frequency selects 910KHz
Low Voltage Reset	Disable	Low voltage reset is disabled
	LVR=1.2V	Low voltage reset point selects 1.2V
	LVR=1.6V	Low voltage reset point selects 1.6V
	LVR=1.8V	Low voltage reset point selects 1.8V
	LVR=2.4V	Low voltage reset point selects 2.4V
	LVR=2.7V	Low voltage reset point selects 2.7V
	LVR=3.1V	Low voltage reset point selects 3.1V
	LVR=3.3V	Low voltage reset point selects 3.3V
	LVR=3.6V	Low voltage reset point selects 3.6V
Code Encryption	Enable	Burn mode data encryption
	Disable	Burn mode data is not encrypted
Reset Port Pull-up	Enable	Enable P63 port pull up
	Disable	Disable P63 port pull up
P63 Port	GPIO	P63 is a general purpose input/output port
	GPI	P63 is a general purpose input port
	RST	P63 is an external reset port

Reset Time	PWRT=WDT=4.5ms	Wake-up setup time =WDT overflow time (no prescale)= 4.5ms
	PWRT=WDT=18ms	Wake-up setup time = WDT overflow time (no prescale)= 18ms
	PWRT=WDT=72ms	Wake-up setup time = WDT overflow time (no prescale)= 72ms
	PWRT=WDT=288ms	Wake-up setup time = WDT overflow time (no prescale)= 288ms
	PWRT=140us,WDT=4.5ms	Wake-up setup time =140us, WDT overflow time (no prescale)=4.5ms
	PWRT=140us,WDT=18ms	Wake-up setup time =140us, WDT overflow time (no prescale)=18ms
	PWRT=140us,WDT=72ms	Wake-up setup time =140us, WDT overflow time (no prescale)=72ms
	PWRT=140us,WDT=288ms	Wake-up setup time =140us, WDT overflow time (no prescale)=288ms
Range Look-up Table	1/4K	Can check the table in the first 1/4K of the program space
	1K	Can check the table within 1K of the program space
Port Characteristics	EMT	The port input characteristic is Schmidt EMT characteristic (see 3.3 for details)
	SMT	The port input characteristic is Schmidt SMT characteristics (see 3.3 for details)
	HSMT	The port input characteristic is Schmidt HSMT characteristics (see 3.3 for details)
	INV	The port input characteristic is the inverter INV characteristic (see 3.3 for details)
P6 Port Wake up	Independent control	P6 port independent control wake-up (0x0D register needs to be set)
	No Independent control	P6 port is not independently control wake-up
RTC(Select IRC to work)	Disable	RTC function is disabled
	Enable	RTC function is enabled
P6 Pull up and down Control	Disable	The pull-down of P65-P64, and the pull-up of P63 are prohibited
	Enable	Enable P65-P64 pull-down and P63 pull-up, which can be controlled by the software
Drive Enhancement	Disable	Port drive capability enhancement disable
	Enable	Port drive capability enhanced enable
Secondary Drive	Disable	P60,P61,P62 Second-stage enhanced fill current output is forbidden

Enhancement	Enable	P60,P61,P62 Second-stage enhanced fill current output is enablement
Crystal Oscillator Pin Built-in Capacitance Selection (RTC enabled)	Built-in Capacitance Disable	The built-in capacitance of the crystal oscillator is off
	Built-in Capacitance 7pf	Built-in Capacitance 7pf
Crystal Oscillator Pin Built-in Capacitance Selection (RTC enabled) Sleep and wake Settings	Built-in Capacitance 9pf	Built-in Capacitance 9pf
	Built-in Capacitance 12.5pf	Built-in Capacitance 12.5pf
	Compatible with the old 153 series	Compatible with the original 153 series wake up
	Sleep allows multiple sources of wake-up at the same time	The wake source category can be identified
POWER	HIGH	When the supply voltage is 5V or close to 5V, select HIGH
	LOW	When the supply voltage is 3.3V or close to 3.3V, select LOW

5 Electrical Characteristics

5.1 Chip Limit Parameter

Operating temperature	(√) E:-40-85;
Storage temperature (℃):	(√) -65～+150;
Limit voltage (V)	(√) other -0.3～6;
Limit input voltage (V)	(√) other GND-0.3～VDD+0.5;
Limit output voltage (V)	(√) other GND-0.3～VDD+0.5;

5.2 Chip DC Parameters

(T=25℃, VDD=5V)

Symbol	Parameter	Condition	Min.	Typ.	Max.	Unit
IRC1	IRC1 (after correction)	OPTION select 8MHz	-	8	-	MHz
IRC2	IRC2 (after correction)	OPTION select 1MHz	-	1	-	MHz
IRC3	IRC3 (after correction)	OPTION select 910KHz	-	910	-	KHz
IOH1	Output high level drive	Ioh=4.4V	4.5	5	5.5	mA
IOH2	Output high level drive	Ioh=4.4V	5.5	6	6.5	mA
IOH3	Output high level drive	Ioh=4.4V	13	14	15	mA
IOL1	IO output low level drive	Iol=0.6V	16	17	18	mA
IOL2	IO output low level drive	Iol=0.6V	13	14	15	mA
IOL3	IO output low level drive	Iol=0.6V	25	26	28	mA
IOL4	IO output low level drive	Iol=0.6V	19	20	21	mA
IOL5	Secondary drive	Iol=0.6V	32	33	34	mA
IPH1	Pull-up current (except	Pull-up enable, input	80	100	130	μA
IPH2	Pull-up current (P63)	Pull-up enable, input	80	120	130	μA
IPD	Pull-down current (except	Pull-down enable,	45	55	80	μA
Isb2	Shutdown current 2	All inputs are connected to VDD, the output is left floating, WDT, LVD disabled	-	-	1	μA
Isb3	Shutdown current 3	RTC mode, internal capacitance 12.5 PF	-	-	12	μA
Iop2	Working current 1 (VDD=5V)	IRC=8MHz 2clock	-	-	15	μA
Iop2	Working current 2 (VDD=5V)	IRC=1MHz 2clock	-	1.2	1.5	mA
LVR	Low voltage reset voltage	Select Vlvr reset	-	0.2	0.3	mA
Isb2	Shutdown current 2	All inputs are connected to VDD, the	Vlvr-0.2	Vlvr	Vlvr+0.	V


Note: The above parameters are for reference only, please refer to the measured data of target

5.3 Characteristic curve

The graphs listed in this chapter are for design reference only. Some of the data may be beyond the specified working range of the chip. To ensure the normal working of the chip, strictly refer to the electrical characteristics.


5.3.1 Internal low speed RC oscillator - voltage-frequency characteristic curve

Operating temperature at 25℃ :(unit Khz)

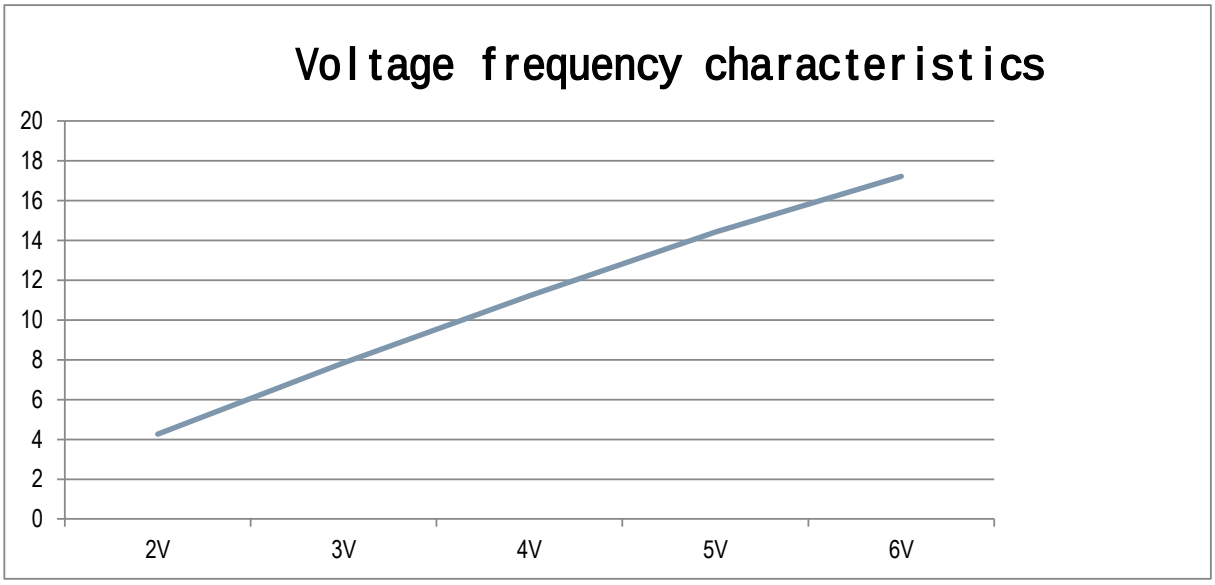


5.3.2 Internal low speed RC oscillator - temperature - frequency characteristic curve

Operating voltage at 5V :(unit Khz)

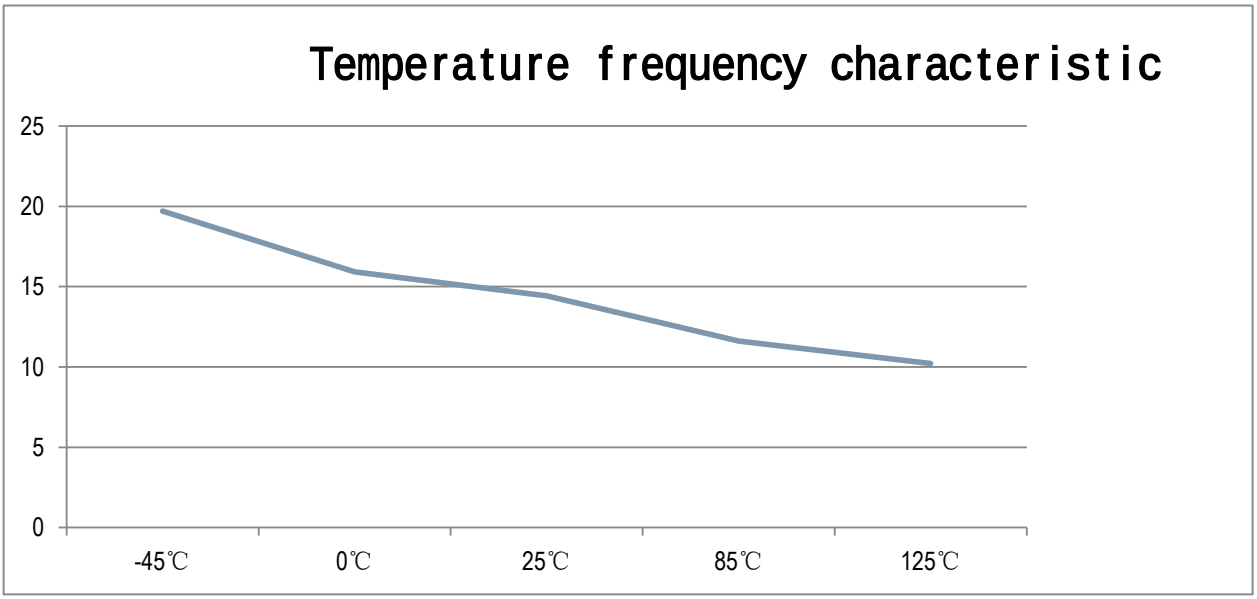


5.3.3 Internal 1Mhz RC oscillator - voltage-frequency characteristic curve

Operating temperature at 25℃ :(unit Khz)

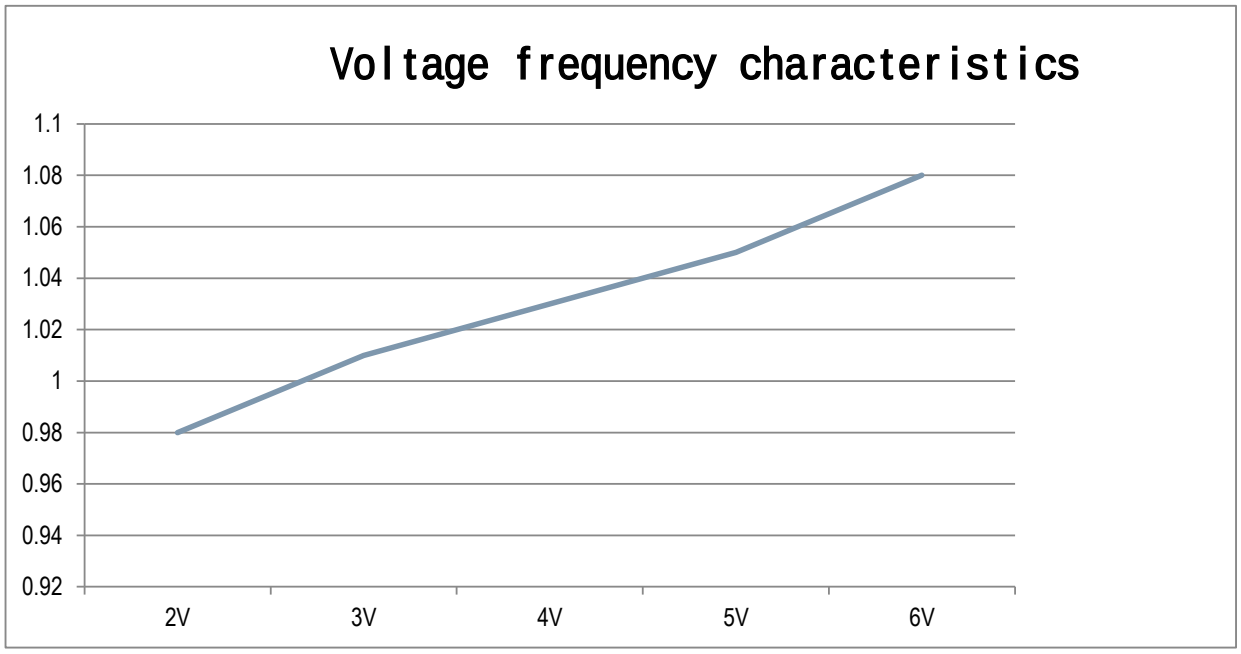


5.3.4 Internal 1Mhz RC oscillator - temperature - frequency characteristic curve

Operating voltage at 5V :(unit Khz)

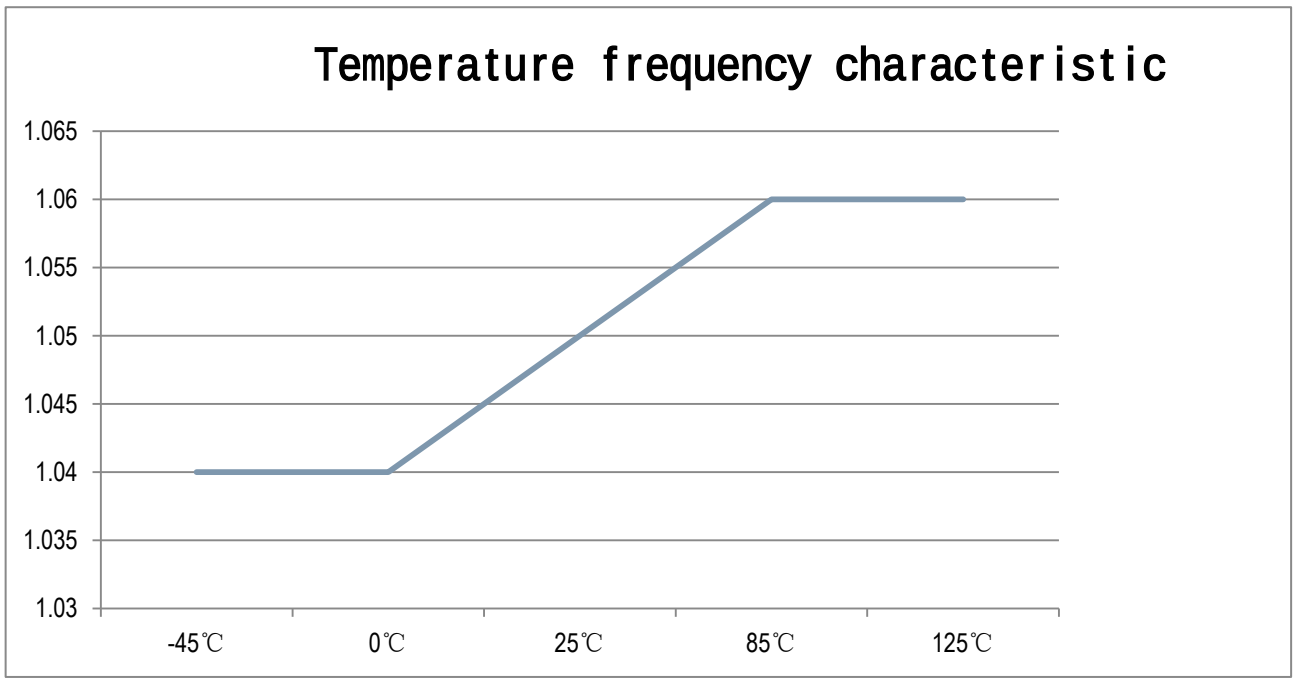


5.3.5 Internal 8 Mhz RC oscillator - voltage-frequency characteristic curve

Operating temperature at 25℃ :(unit Khz)

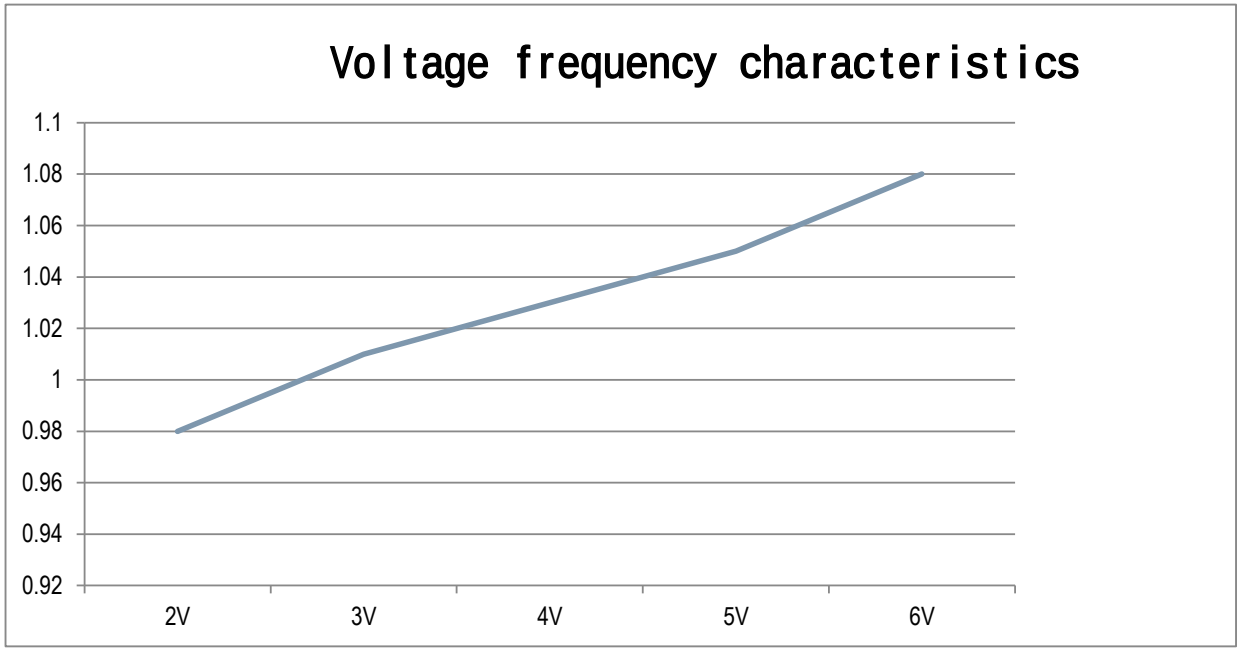

5.3.6 Internal 8 Mhz RC oscillator - temperature - frequency characteristic curve


Operating voltage at 5V :(unit Khz)

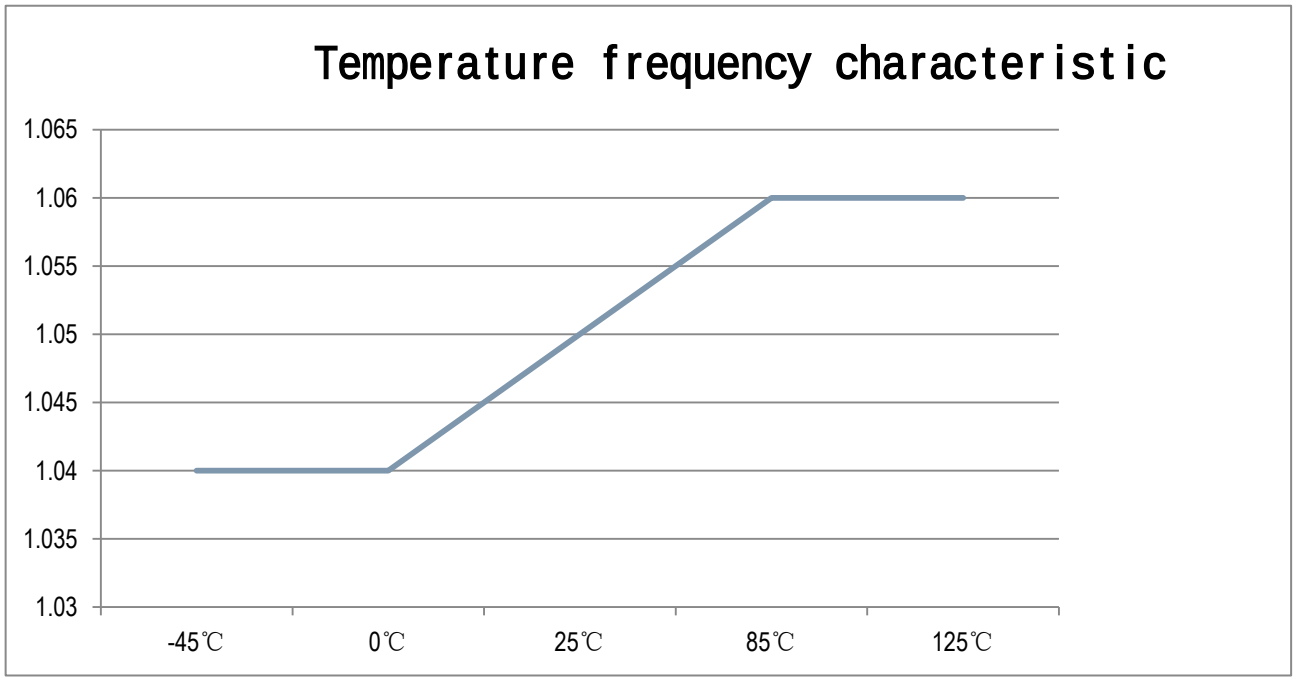


6 Package Size Information

6.1 8PIN Package Size

unit: mm

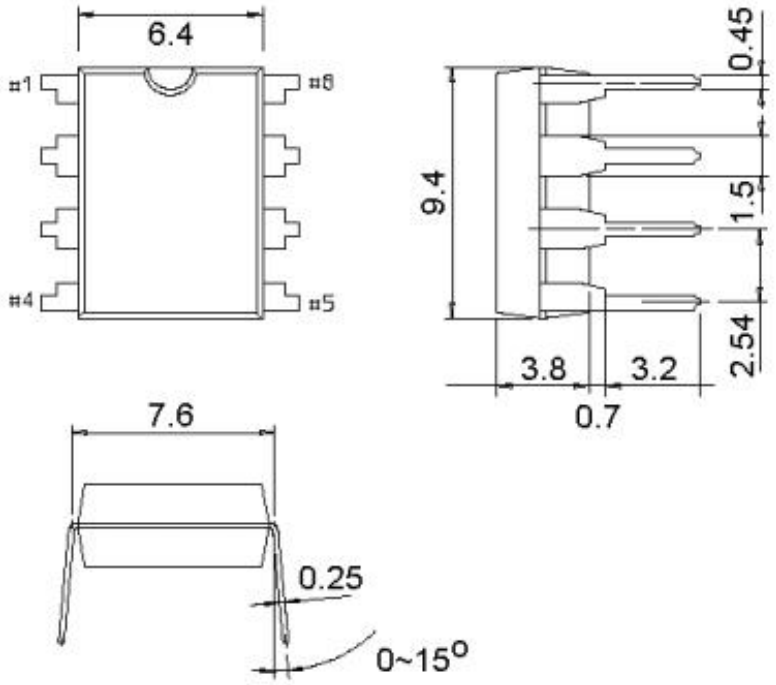

DIP8 Package Size

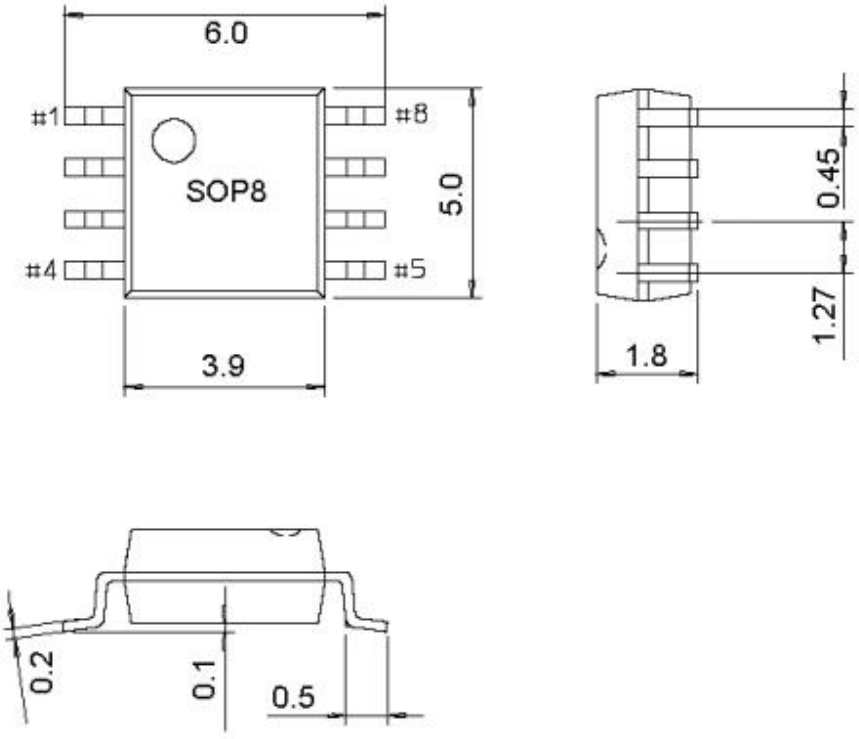

SOP8 Package Size

6.2 6PIN Package Size

unit: mm

Size / Mark	Minimum	Maximum	Size / Mark	Minimum	Maximum
A	2.82	3.02	C	1.05	1.15
e	0.95 (BSC)		C1	0.03	0.15
b	0.28	0.45	C2	0.12	0.23
B	1.50	1.70	L	0.35	0.55
B1	2.75	3.05	θ	0°	8°

